

# CU0715 – 70 lb Self-Contained Ice Machine

Self-Contained Under Counter Cuber with Storage

Preliminary



## Features and Benefits

### Reliability

- 3 year parts and labor warranty
- Assembled in the USA
- Corrosion resistant exterior

### Ease of Use

- Slide back door allows easy access to ice in the bin
- Intuitive control panel allows for quick and easy operation
- Ice scoop included

### Compact Design

- Only 15" wide, the ice maker can be placed in the tightest locations
- Optional floor mount kit allows for installation under 34" ADA counter tops

### High Production

- Produces up to 80 lb (36 kg) per day and stores 36 lb (16 kg), meeting the ice demands for many different applications

### Quality Ice

- Unique evaporator produces crystal clear cubes

### Environmentally Friendly

- Meets US federal energy efficiency requirements
- Meets US Safe Drinking Act low lead requirements
- Non-ozone depleting R-134A refrigerant

## 24 Hour Volume Production

### Air Cooled

Air Cooled		AHRI
70°F/21°C	Air	90°F/32°C
50°F/10°C	Water	70°F/21°C
lb/kg		lb/kg
80/36		58/26

### Intuitive Controls



### Clear Cube Evaporator Technology



Intertek



Intertek



CERTIFIED  
**ISO**  
9001:2008



### Optional Kit for ADA Applications -Unit seals to the floor



31.9"  
(81.1 cm)

### Cube Ice




Cube Dimensions  
3/8" x 3/8" x 3/8"  
(2.22 x 2.22 x 2.22 cm)

Large, slow-melting ice form, ideal for beverages.

### Warranty

- 3 year parts and labor on all components.

Warranty valid in North, South & Central America.  
Contact factory for warranty in other regions.

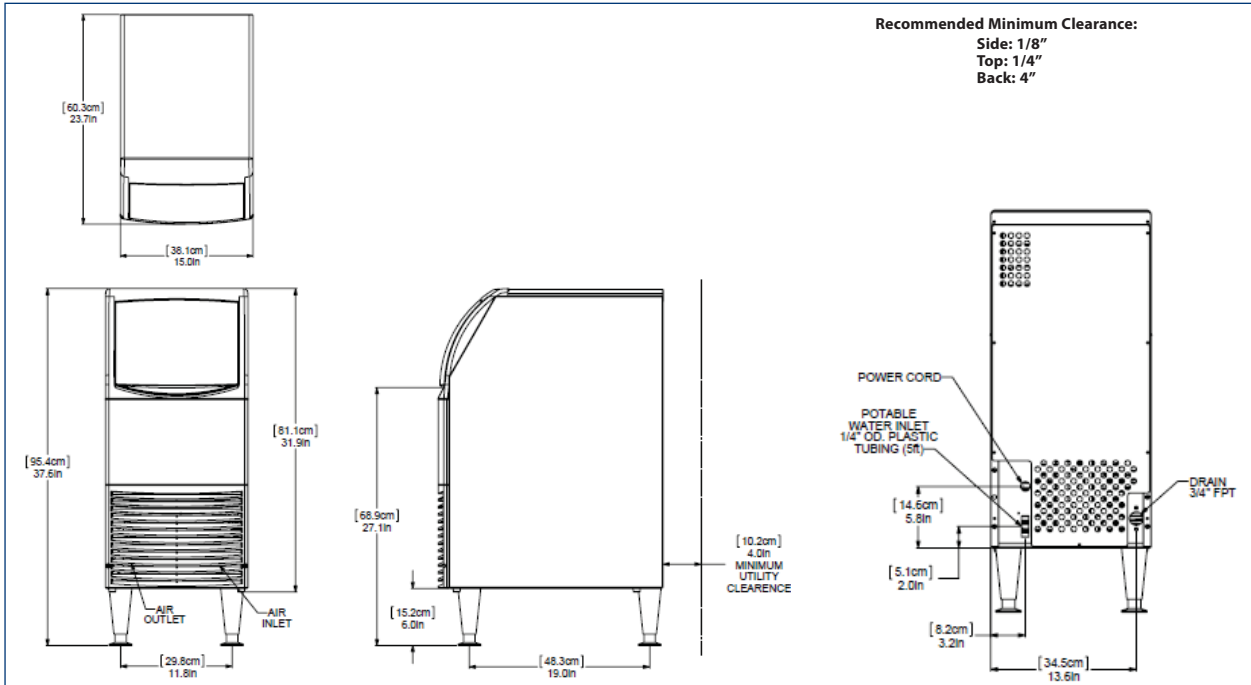

## Specifications

Model Number	Condenser Unit	Storage Capacity lb/kg	Basic Electrical Volts/Hz/Phase	Max. Fuse Size or HACR Circuit Breaker (amps)	Circuit Wires	Min. Circuit Ampacity	Energy Consumption kWh/100 lb (45.4 kg) 90°F(32°C)/70°F(21°C)	Potable Water Usage Gallons/100 lb (liters/45.4 kg) 90°F(32°C)/70°F(21°C)
CU0715MA-1	Air	36/16	115/60/1	15	2	Cord	11.0	30/114
*CUR0715MA-32	Air	36/16	220/60/1	15	2	Cord	11.0	30/114
CU0715MA-6	Air	36/16	220-240/50/1	15	2	Cord	11.0	30/114

\*Configured for Inmetro requirements

## All Models

Dimensions (W x D x H):

Unit:

15" x 24" x 38"  
(38.1 x 61.0 x 96.5 cm)

Includes 6" (15.24 cm) adjustable legs

Shipping Carton:

16" x 27" x 37"  
(40.6 x 68.5 x 94 cm)

Shipping Weight:

102 lb / 46 kg

BTUs per hour: 2300

Refrigerant: R-134A

## Accessories

Model Number	Description
KUFM15	For ADA applications. Floor mount kit lowers overall height to 31.9"

\* Scotsman recommends all ice machines have water filtration. See Scotsman Sanitation Matrix for details.

## Operating Requirements

	Minimum	Maximum
Air Temperatures	50°F (10°C)	100°F (38°C)
Water Temperatures	40°F (4.4°C)	100°F (38°C)
Water Pressures	15 PSIG (1.4 bar)	80 PSIG (5.5 bar)
Electrical Voltage	-10%	+10%

